

Перед настройкой включите адаптер питания роутера в розетку, подключите кабель провайдера к WAN-интерфейсу маршрутизатора, а один из LAN-портов соедините кабелем с сетевой картой вашего компьютера.

По умолчанию, на роутере активирован DHCP сервер, поэтому в настройках сетевого подключения ставим галочку «Получить IP-адрес автоматически» и нажимаем ОК. Далее в адресной строке браузера вводим адрес <http://192.168.0.1> или <http://192.168.1.1>


Для авторизации используйте

Username: **admin**

Password: admin (еще могут быть варианты: 1234, 12345, пустой пароль)

Нажимаем **Войти/Авторизация/Login** для входа в настройки

Нажимаем **SETUP** выбираем **INTERNET SETUP** и нажимаем на **Manual Internet Connection Setup**.

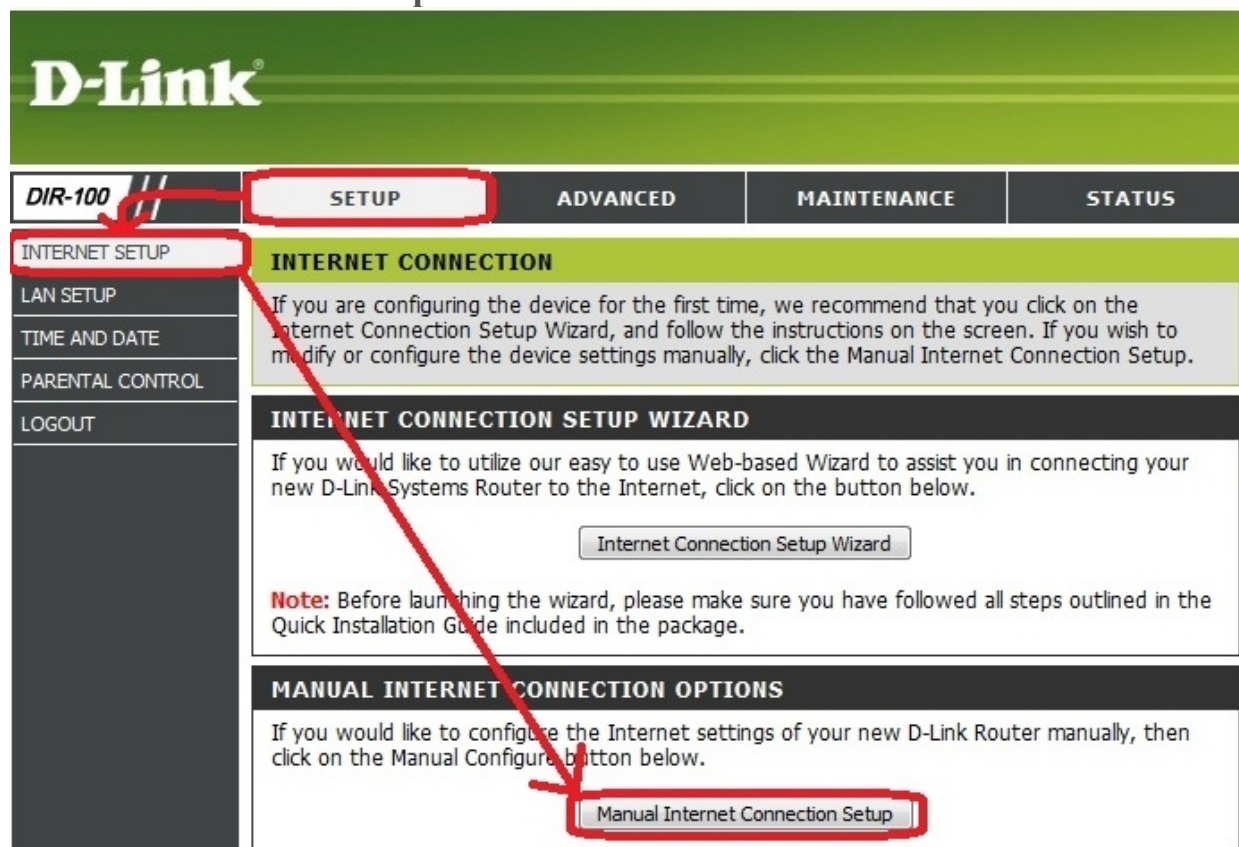

Выбираем в поле напротив **My Internet Connctcion is** и выбираем **PPPoE (Username / Password)**

D-Link®

DIR-100 //	SETUP	ADVANCED	MAINTENANCE	STATUS
-------------------	-------	----------	-------------	--------


INTERNET CONNECTION

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is: Static IP 

PPPoE (Username / Password)

Static IP

Dynamic IP (DHCP)

PPTP (Username / Password)

L2TP (Username / Password)

BigPond(Australia)

Russia PPPoE(Dual Access)

Russia PPTP(Dual Access)

STATIC IP ADDRESS INFORMATION

Enter the static address information for your Internet Service Provider (ISP).

IP Address:

Subnet Mask:

ISP Gateway Address:

MAC Address: - - - - - (optional)

Primary DNS Address:

Secondary DNS Address: (optional)

MTU:

В поле **User Name** вписываем ваш логин. Ниже вводим пароль и в поле **Confirm Password** вводим пароль ещё раз. Напротив **Connect mode select** ставим **Always-on** и жмём **Save Settings**.

INTERNET SETUP

LAN SETUP

TIME AND DATE

PARENTAL CONTROL

LOGOUT

INTERNET CONNECTION

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings

Don't Save Settings

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is: PPPoE (Username / Password) ▼

PPPOE

Enter the information provided by your Internet Service Provider (ISP).

Dynamic PPPoE Static PPPoE

User Name: LOGIN

Password: ●●●●●●

Confirm Password: ●●●●●●

Service Name: (optional)

IP Address: 0.0.0.0

MAC Address: 00 - 9 - 21 - 63 - 8E - 66 (optional)

Clone MAC Address

Primary DNS Address: 0.0.0.0

Secondary DNS Address: 0.0.0.0 (optional)

Maximum Idle Time: 5 Minutes

MTU: 1492

Connect mode select: Always-on Manual Connect-on demand

Save Settings

Don't Save Settings